



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

FERRAZ SHAWMUT FUSES

FERRAZ SHAWMUT AMP-TRAP FUSES CLASS L




A4BY is a high interrupting capacity current limiting fuse for the protection of service entrance equipment, feeder circuits and circuit breakers. UL Class L: Current limiting, 4 seconds delay, 200kA IR, 600 VAC.

Buss Cross Reference: KRP-C

GSF No. & Amps	Price/Each
A4BY800	\$304.72
A4BY1200	304.72
A4BY1600	418.74
A4BY2000	545.50
A4BY2500	729.94

FERRAZ SHAWMUT TRI-ONIC TIME DELAY FUSES CLASS RK5



A popular fuse for motor branch circuits. Also suitable for general purpose protection of transformers, service entrance equipment, feeder circuits and branch circuits. UL Class RK5: Time delay, current limiting, 200kA IR, 250 and 600 VAC.

Buss Cross Reference: FRN-R & FRS-R

GSF No. & Amps	Standard Package	Price/Each	GSF No. & Amps	Standard Package	Price/Each
250 VOLTS			600 VOLTS		
TR1/2R	10	\$7.42	TRS1R	10	\$13.71
TR1R	10	6.83	TRS1-6/10R	10	13.71
TR1-1/4R	10	8.35	TRS2R	10	13.04
TR2R	10	6.58	TRS2-1/4R	10	13.88
TR2-1/2R	10	7.26	TRS2-1/2R	10	13.71
TR3R	10	6.27	TRS3R	10	12.12
TR3-1/2R	10	6.71	TRS4R	10	12.12
TR4R	10	6.27	TRS5R	10	12.12
TR4-1/2R	10	6.71	TRS6-1/4R	10	12.76
TR5R	10	6.01	TRS7R	10	12.76
TR6-1/4R	10	6.65	TRS8R	10	12.12
TR7R	10	6.71	TRS9R	10	12.76
TR8R	10	6.27	TRS10R	10	12.12
TR9R	10	7.10	TRS12R	10	12.12
TR10R	10	6.01	TRS15R	10	10.69
TR12R	10	6.27	TRS17-1/2R	10	10.69
TR15R	10	4.83	TRS20R	10	10.69
TR17-1/2R	10	5.15	TRS25R	10	10.69
TR20R	10	4.83	TRS30R	10	10.69
TR25R	10	4.83	TRS35R	10	18.35
TR30R	10	4.83	TRS40R	10	18.35
TR35R	10	8.80	TRS45R	10	18.35
TR40R	10	8.80	TRS50R	10	18.35
TR45R	10	8.80	TRS60R	10	18.35
TR50R	10	8.80	TRS70R	5	37.91
TR60R	10	8.80	TRS80R	5	37.91
TR70R	5	19.82	TRS90R	5	37.91
TR80R	5	19.82	TRS100R	5	37.91
TR90R	5	20.78	TRS110R	1	75.87
TR100R	5	19.82	TRS125R	1	75.87
TR110R	1	49.38	TRS150R	1	75.87
TR125R	1	43.58	TRS175R	1	75.87
TR150R	1	43.58	TRS200R	1	75.87
TR175R	1	45.70	TRS225R	1	151.69
TR200R	1	43.58	TRS250R	1	151.69
TR225R	1	82.45	TRS300R	1	151.69
TR250R	1	82.45	TRS350R	1	151.69
TR300R	1	82.45	TRS400R	1	151.69
TR350R	1	84.00	TRS500R	1	220.14
TR400R	1	78.59	TRS600R	1	220.14
TR500R	1	128.69			
TR600R	1	128.69			

FERRAZ SHAWMUT AMP-TRAP 2000 TIME DELAY FUSES CLASS RK1




A2D (250V) and A6D (600V) provide both time delay for motor loads and a high degree of current limitation for minimizing short circuit current damage. Suitable for the protection of service entrance equipment, feeder circuits, and branch circuits serving both motor and non-motor loads. UL Class RK1: Time delay, current limiting, 200kA IR, 250 and 600 VAC.

Buss Cross Reference: LPN-RK & LPS-RK

GSF No. & Amps	Standard Package	Price/Each
250 VOLTS		
A2D20R	10	\$7.93
A2D30R	10	7.93
A2D60R	10	14.58
A2D100R	5	32.66
A2D200R	1	71.88
A2D400R	1	129.53
600 VOLTS		
A6D30R	10	17.65
A6D60R	10	30.26
A6D100R	5	62.51
A6D200R	1	125.05
A6D400R	1	250.00
A6D600R	1	362.84

FERRAZ SHAWMUT AMP-TRAP FAST ACTING FUSES CLASS RK1

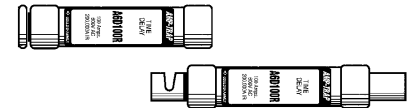

Provides a high degree of current limitation. Suitable for the protection of circuit breakers, loadcenters, panelboards, switchboards, and bus duct. UL Class RK1: Fast acting, current limiting, 200kA IR, 250 and 600 VAC.

Buss Cross Reference: KTN-R & KTS-R

GSF No. & Amps	Standard Package	Price/Each
250 VOLTS		
A2K30R	10	\$18.32
A2K60R	10	39.32
A2K100R	5	83.90
A2K150R	1	169.80
A2K200R	1	157.84
A2K400R	1	333.54
A2K600R	1	433.40
600 VOLTS		
A6K30R	10	23.03
A6K60R	10	49.07
A6K100R	5	92.58
A6K150R	1	184.94
A6K200R	1	174.97
A6K400R	1	368.57
A6K600R	1	501.46

SMALL DIMENSION FUSES




SHAW SUPPLY COMPANY

1066 East 16th Street

816-221-0060

www.shawsupply.com

FERRAZ SHAWMUT TRI-ONIC MIDGET TIME DELAY FUSES TYPE TRM




Time delay fuses. 250 VDC. 10kA IR. Dimensions: 1-1/2" x 13/32". Applications: Time delay for high inrush loads, small motors, small transformers and control circuits.

Buss Cross Reference: FNM

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
TRM	1/2, 6/10	\$5.16
	1-1/4	5.76
	1	4.88
	2, 5	4.45
	3, 4, 8	4.65
	2-1/4	5.74
	2-1/2	5.02
	4-1/2	5.94
	5-6/10, 9	5.94
	3-1/2, 7	4.75
	6, 12	5.02
	10, 15	4.45

FERRAZ SHAWMUT AMP-TRAP MIDGET TIME DELAY FUSES TYPE ATQ




Time delay fuses. 500 VAC. 10kA IR. Dimensions: 1-1/2" x 13/32". Applications: Small motor circuits, small transformers and HID lighting.

Buss Cross Reference: FNQ

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
ATQ	1, 2, 3, 4, 5, 6, 8	\$12.83
	10, 12, 15, 20, 25, 30	12.83
	1/2, 1-6/10, 2-1/2	13.51
	2-1/4	16.21
	3-1/2	14.49

FERRAZ SHAWMUT AMP-TRAP MIDGET FAST ACTING FUSES TYPE ATM



Fast acting fuses. 600 VAC. 100kA IR. 500 VDC UL rating. Dimensions: 1-1/2" x 13/32". Applications: Control circuits, lighting circuits - indoor/outdoor, small motors and small transformers.

Buss Cross Reference: KTK

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
ATM	1, 2, 3, 5, 10, 15	\$10.62
	4, 8	10.82
	6	10.32
	12	12.46
	20, 25, 30	10.66

FERRAZ SHAWMUT AMP-TRAP MIDGET FUSES CLASS CC—TYPE ATMR




Current limiting. 600 VAC. 200kA IR. Dimensions: 1-1/2" x 13/32". Features: Suitable for branch circuit protection, rejection dimensions, fiberglass body for dimensional stability.

Buss Cross Reference: KTK-R

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
ATMR	1, 1-1/2, 2, 3, 5	\$11.64
	10, 15, 20, 30	11.64
	4, 8, 25	12.39
	1/2, 6	12.32

FERRAZ SHAWMUT GLASS BODY TIME DELAY FUSES 1/4" x 1-1/4"—TYPE GDL




1/16 to 8 amps, 250 VAC. 10 to 15 amps, 125 VAC.

Buss Cross Reference: MDL

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
GDL	1/8	\$4.02
	1/4	2.49
	3/10, 4/10, 10	2.49
	3/4, 6/10, 8/10	2.27
	1-1/4, 1-1/2, 2, 3, 4, 5,	1.79
	6, 8	1.79
	1/2, 1	2.27
	2-1/2, 3-2/10, 6-1/4, 7	1.90
	15	2.53

FERRAZ SHAWMUT GLASS BODY FAST ACTING FUSES 1/4" x 1-1/4"—TYPE GGC




1/10 to 10 amps, 250 VAC. 12 to 15 amps, 125 VAC.

Buss Cross Reference: AGC

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
GGC	1/10, 1/8	\$2.42
	1/4	1.51
	1/2, 3/4	1.03
	1, 1-6/10	.65
	1-1/2	.74
	2, 2-1/2, 3	.65
	4	.83
	5, 6	1.00
	7-1/2, 8, 10	.83
	12, 15, 20, 25, 30	.81

FERRAZ SHAWMUT CERAMIC BODY FAST ACTING FUSES 1/4" x 1-1/4"—TYPE GAB



1/2 to 8 amps, 250 VAC. 10 amps, 125 VAC. 12 and 15 amps, 250 VAC.

Buss Cross Reference: ABC

STANDARD PACKAGE 10

GSF No.	Amps	Price/Each
GAB	1, 2, 3, 4	\$1.79
	5, 6, 8, 10, 12, 15	1.64
	7	1.70


We Offer A Complete Line Of Ferraz Shawmut Fuses. If You Don't See A Product Listed, Call Us. We Will Be Glad To Provide You With The Information You Need.



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

PLUG FUSES, FUSEHOLDERS

FERRAZ SHAWMUT GLASS BODY FUSES FOR FLUORESCENT LIGHTS—TYPE SLR




1/4" glass body fuses with attached knob, nickel plated ferrules. UL Listed 250 VAC.

Buss Cross Reference: GLR

STANDARD PACKAGE 5

GSF No.	Amps	Price/Each
SLR	1/2	\$3.74
	1	1.98
	2, 3, 4, 5	1.97
	6, 7, 8, 9, 10	2.05

FERRAZ SHAWMUT PLUG FUSES TIME DELAY—TYPE GT




10kA IR. 125 VAC. Edison base.

Buss Cross Reference: T

GSF No. & Amps	Standard Package	Price/Each
GT15	4	\$2.94
GT20	4	2.94
GT30	4	2.94

FERRAZ SHAWMUT BOX COVER UNITS



CSU



CRU

CSU Plug fuse receptacle and On/Off switch for motor circuits up to 1/2 HP, 125 VAC. Fits 2-1/4" handy box.

Buss Cross Reference: SSU

CRU Plug fuse receptacle and receptacle for grounding plug. For motor circuits up to 1/2 HP, 125 VAC. Fits 2-1/4" handy box.

Buss Cross Reference: SRU

GSF No.	Price/Each
CRU	\$23.09
CSU	19.64


FERRAZ SHAWMUT IN-LINE BREAKAWAY FUSEHOLDERS



Accepts any 1-1/2" x 13/32" fuse. 3 internal O-Rings per pole and 2 Insulation Boots provide exceptional seal. Rated 30A, 600 VAC.

GSF No.	Description	Standard Package	Price/Each
FEB11-11BA	Fuseholder w/crimp terminals.	10	\$44.92
FEB81-81BA	Fuseholder w/set-screw terminals.	10	78.46

FERRAZ SHAWMUT PANEL MOUNT FUSE HOLDER



Panel mount fuse holder for 1-1/2" x 13/32" fuses. Bayonet style knob. 1/4" quick-connect terminals. Phenolic insulator. Rated 30A, 600V.

Buss Cross Reference: HPS


GSF No.	Standard Package	Price/Each
GPMB	5	\$9.81

FUSEHOLDERS, REDUCERS, PULLERS



SHAW SUPPLY COMPANY
1066 East 16th Street
816-221-0060
www.shawsupply.com

FERRAZ SHAWMUT FUSE BLOCKS



Multi-pole blocks may be assembled by ganging adder blocks and an end block.

MIDGET BLOCKS—1-1/2" x 13/32" FUSES—600V

GSF No.	Description	Standard Package	Price/ Each
30320	Adder block.	10	\$6.15
U09301	End block.	25	.96

STANDARD DIMENSION BLOCKS


GSF No.	Amps	Description	Standard Package	Price/ Each
---------	------	-------------	------------------	-------------

CLASS R—250 VOLT

20305R	30	Adder block.	1	\$9.65
U09322	30	End barrier.	25	1.05
20605R	60	Adder block.	1	12.85
U09365	60	End barrier.	25	2.92

CLASS R—600 VOLT



60305R	30	Adder block.	1	16.34
U09361	30	End barrier.	25	2.40
60605R	60	Adder block.	1	20.18
U09365	60	End barrier.	25	2.92



FOR 1/4" X 1-1/4" GLASS FUSES

GSF No.	Standard Package	Price/ Each
6X32QC1	10	\$2.64

FERRAZ SHAWMUT FUSE REDUCERS CLASS R—REJECTION



STANDARD PACKAGE 10

GSF No.	Equipment Fuse Clips	Fuse (Case) Size	Price/ Each
---------	----------------------	------------------	-------------

250 VOLTS

R632	60A	30A	\$14.47
R162	100A	60A	19.60
R212	200A	100A	40.22

600 VOLTS

R636	60A	30A	15.43
R166	100A	60A	34.52
R212	200A	100A	40.22
R422	400A	200A	182.56

FERRAZ SHAWMUT COPPER NEUTRALS



GSF No. & Amps	Standard Package	Price/ Each
----------------	------------------	-------------


250 VOLTS

NL30	1	\$9.12
NL60	1	18.37
NL100	1	24.88
NL200	1	58.11
NL400	1	97.69

600 VOLTS

NLS30	1	16.06
NLS60	1	23.79
NLS100	1	47.90
NLS200	1	82.31

IDEAL FUSE PULLERS



IDL No.	Description	Standard Package	Price/ Each
34-002	0 to 100A, 250/600V, 7-1/2" long.	10	\$14.03
34-003	31 to 600A, 250V, and 31 to 400A, 600V, 11-3/4" long.	1	28.75



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

TAPES, SPLICING MATERIALS

3M SCOTCH BRAND PLASTIC TAPES SCOTCH 33+ TAPE



Use as primary insulation for wire cable splices up to 600V and for fixture and wire splices up to 1000V, 7-mil. thickness. All weather. Black.

MMM No.	Size	Standard Package	Price/Each
33+	3/4" x 66'	10-100	\$4.62

SCOTCH 35 TAPE



Same electrical qualities as 33+, but available in colors for identification.

MMM No.	Color	Size	Standard Package	Price/Each
35-BLUE	Blue	3/4" x 66'	10-100	\$3.86
35-BRN	Brown	3/4" x 66'	10-100	3.86
35-GRY	Gray	3/4" x 66'	10-100	3.86
35-GRN	Green	3/4" x 66'	10-100	3.86
35-OR	Orange	3/4" x 66'	10-100	3.86
35-RED	Red	3/4" x 66'	10-100	3.86
35-VIO	Violet	3/4" x 66'	10-100	3.86
35-WHT	White	3/4" x 66'	10-100	3.86
35-YEL	Yellow	3/4" x 66'	10-100	3.86

SCOTCH 88 TAPE



8.5-mil. thickness provides extra electrical qualities and insulation build-up. Weather and cold resistant. Black.

MMM No.	Size	Standard Package	Price/Each
88	3/4" x 66'	10-100	\$4.68

VINYL TAPE

Moderately priced 7-mil. electrical tape.

MMM No.	Size	Standard Package	Price/Each
1700	3/4" x 60'	10-100	\$1.16

3M GLASS CLOTH ELECTRICAL TAPE



A 7-mil. tape which performs at Class B temperatures (130°C/266°F). Provides heat-stable insulation for hot-spot applications such as furnace and oven controls, motor leads, etc.

MMM No.	Size	Standard Package	Price/Each
27	1/2" x 66'	1-10	\$7.84

3M LINERLESS RUBBER SPLICING TAPE



Linerless 130C is a self-bonding, 30-mil. insulating tape. Use as primary electrical insulation for splicing all solid cable through 69 kV.

MMM No.	Size	Standard Package	Price/Each
130C	3/4" x 30'	1-24	\$11.27

SCOTCH 2228 RUBBER MASTIC TAPE

Pad, seal and insulate bus bar and other electrical connections rated up to 1000 volts. Highly conformable insulation sticks fast and stays tight. The stable mastic holds its position through a range of temperatures to reduce cold flow and oozing.

MMM No.	Size	Standard Package	Price/Each
2228	2" x 10'	1-10	\$22.32

3M SCOTCHKOTE ELECTRICAL COATING



Provides a tough, oil-resistant outer seal on electrical insulation subjected to abnormal weathering, oil or moisture conditions, such as splices in manholes, underwater cables, etc.

MMM No.	Size	Standard Package	Price/Each
• Scotchkote	15 oz.	1-10	\$22.97

INSULATING MATERIALS & WIRE CONNECTORS



SHAW SUPPLY COMPANY
1066 East 16th Street
816-221-0060
www.shawsupply.com



3M COLD SHRINK CONNECTOR INSULATORS 1000V

No torches, tools, heat or glue. Simply position the tube over connector and remove the core by unwinding it. It will shrink uniformly providing an excellent waterproof seal.

MMM No.	Cond. Size	Min. Dia. For Seal	Max. Dia. Insulator Covers	Max. Conn. Lgth.	Std. Pkg.	Price/Each
8425-8	2 - 1/0	.39"	.70"	3"	10	\$11.45
8426-9	2/0 - 250	.51"	1.00"	5"	10	13.64
8427-12	250 - 400	.69"	1.30"	8"	10	20.36
8428-12	500 - 800	.95"	1.90"	8"	10	29.01

3M HEAT SHRINK CABLE SLEEVES THICK WALL



For 600V In-line splicing and sealing. Designed for submersible, direct-burial, and URD applications.

MMM No.	Cable Range	Expanded/Recovered I.D., In.	Cut Lgth., In.	Std. Pkg.	Price/Each
ITCSN-0400-6	12 - 6	.400 - .150	6	25	\$3.55
ITCSN-0800-9	8 - 1/0	.800 - .200	9	25	4.92
ITCSN-1100-9	2 - 4/0	1.00 - .370	9	25	6.64
ITCSN-2000-12	250 - 750	2.00 - .650	12	10	14.11

3M SCOTCHCAST INLINE RESIN SPLICING KITS

Insulates and moisture-seals single-conductor, non-shielded cable splices through 5 kV, and multi-conductor cables through 1000V. Kit contains two-piece, snap-together mold, two funnels, tape for sealing mold ends and Scotchcast 4 insulating Resin.

MMM No.	Cond. Size	Max. Cable O.D., In.	Max. Conn. O.D., Sleeve Type, In.	Std. Pkg.	Price/Each
82-A1	Up to 2	5/8	13/32	10	\$24.94
82-A2	2 to 3/0	1	5/8	10	39.75
82-A3	3/0 to 400	1-7/16	1	10	65.49

3M ELECTRICAL INSULATING RESIN

Two-part epoxy insulating and encapsulating resin. Generates its own heat to cure. An excellent insulator and sealer for cable splicing.

MMM No.	Size	Standard Package	Price/Each
4-A	3.2 oz.	10	\$13.76

DUCT TAPE

Premium silver duct tape. 2" wide, 60 yds. long.

PLY No.	Standard Package	Price/Each
3149	24	\$7.92

3M SCOTCHFIL ELECTRICAL INSULATION PUTTY



An electrical-grade, rubber-based, elastic-type putty in tape form. Molds around irregular shapes. Insulates connections up to 600V. Note: Scotchfil must be overwrapped with 130C tape.

MMM No.	Size	Std. Pkg.	Price/Each
Scotchfil	1-1/2" x 60"	4	\$9.75



3M VINYL MASTIC PADS


Made of self-fusing, rubber-based insulating compound, laminated to an all-weather vinyl (PVC) backing. Molds easily around difficult shapes. Will insulate, moisture-seal and pad all connections up to 600V.

PRICE PER PAD

MMM No.	Size	Std. Pkg.	Price/Each
2200	4-1/2" x 6-1/2"	10	\$4.48

3M SCOTCHLOK INSULATED CONNECTORS

105° C



MMM No.	Color	Wire Sizes	Standard Package	Price
STANDARD CONNECTORS—PRICE PER 100				
Y	Yellow	22 - 12	100-1000	\$11.75
Y-Bulk	Yellow	22 - 12	500-10,000	8.50
R	Red	16 - 10	100-1000	15.34
R-Bulk	Red	16 - 10	500-10,000	11.65
G	Gray	14 - 8	100-1000	33.00
B	Blue	12 - 6	100-1000	55.11

COMBINATION CONNECTORS—PRICE PER 1000

MMM No.	Color	Wire Sizes	Standard Package	Price
R/Y+-Bulk	Red/ Yellow	18-8	500-4000	97.04
B/G+-Bulk	Blue/ Gray	14-10	250-2000	267.81
O/B+-Bulk	Orange/ Blue	22-12	500-10,000	64.29

ACCESSORIES

MMM No.	Description	Price/Each
WCD-P	Wire conn. power drive.	\$7.36

3M INSULATED ELECTRICAL SPRING CONNECTORS



PRICED PER 1000


MMM No.	Color	Wire Sizes	Standard Package	Price
212-B	Tan	18 - 10	500-10,000	\$71.74
312-B	Yellow	22 - 12	500-10,000	88.50
512-B	Red	20 - 8	500-10,000	116.19



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

WIRE CONNECTORS

SCOTCHLOK SELF-STRIPPING TAP CONNECTORS

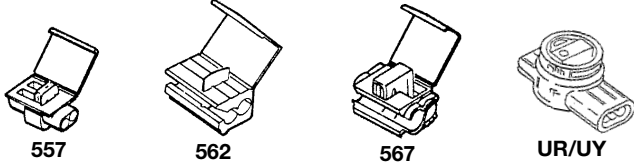


Unique U-contact goes through insulation with a squeeze and holds copper conductors firm. No stripping. Fast installation. Connectors are pre-insulated.

PRICED PER 100

MMM No.	Color	Description	Standard Package	Price
557	Red	Pigtail conn. for 18 - 22 AWG.	100-1000	\$20.65
562	Yellow	In-line splice: Main 12 sol/str. - 10 str. Tap 10 str.	100-1000	23.58
567	Brown	In-line splice: Main 12 - 10 sol/str. Tap 18 - 14 sol/str.	100-1000	32.39
UR	Red	I.D.C. conn., 3 port splice conn. used with 2 or 3 solid conductors - 19-26 AWG.	100-1000	13.84
UR2	Red	Same as UR except max. insulation is .082" instead of .060".	100-1000	10.77
UY	Yellow	I.D.C. conn., 2 port splice conn. used with 2 solid conductors - 22-26 AWG.	100-1000	17.93

BUCHANAN CRIMP TYPE CONNECTORS AND INSULATORS COPPER



PRICED PER 100

BCN No.	Wire Size	Standard Package	Price
2006S	2 - 18 thru 4 - 12	100-1000	\$8.34

INSULATORS AND TOOLS


BCN No.	Description	Standard Package	Price
2007	For 2006S conn.	100-1000	\$17.61
C24	Buchanan, crimp tool.	1	70.56



IDEAL WIRE-NUT WIRE CONNECTORS

PRICED PER 100

IDL No.	Wire Ranges	Color	Std. Pkg.	Price
30-071	Min. 1/20 & 1/22, Max. 2/16.	Gray	100-1000	\$6.64
30-072	Min. 2/18, Max. 3/16.	Blue	100-1000	7.49
30-073	Min. 3/20, Max. 3/16 & 1/18.	Orange	100-1000	8.73
30-074	Min. 1/14 & 1/18, Max. 4/14 & 1/8.	Yellow	100-1000	9.93
30-076	Min. 2/14, Max. 2/10 & 2/12.	Red	100-1000	14.81



IDEAL WING-NUT WIRE CONNECTORS

PRICED PER 100

IDL No.	Wire Ranges	Color	Standard Package	Price
30-451	Min. 2/18, Max. 3/12.	Yellow	100-Box	\$11.32
30-651	Min. 2/18, Max. 3/12.	Yellow	500-Bag	7.21
30-452	Min. 2/14, Max. 5/12.	Red	100-Box	14.92
30-652	Min. 2/14, Max. 5/12.	Red	500-Bag	93.07
30-454	Min. 3/12, Max. 1/6 & 2/8.	Blue	50-Box	39.80

TWISTER — TWISTER PRO



Twister Pro



Twister

TWISTER — PRICED PER 100

IDL No.	Wire Ranges	Color	Standard Package	Price
30-341	Min. 3/22-Max. 3/10	Tan	100-Box	\$13.76
30-342	Min. 3/14-Max. 4/10	Gray	50-Box	26.52
30-641	Min. 3/22-Max. 3/10	Tan	500-Bag	8.24

TWISTER PRO — PRICED PER 100

30-244J	Min. 2/18-Max. 4/10	Red/Black	250	10.78
---------	---------------------	-----------	-----	-------

IDEAL GROUNDING CONNECTORS



Designed for making ground connections and bonding non-metallic sheathed cable.

PRICED PER 100

IDL No.	Wire Ranges	Color	Standard Package	Price
30-092	Min. 2/14, Max. 3/12 & 1/14	Green	100-Box	\$18.10
30-292	Min. 2/14, Max. 3/12 & 1/14	Green	500-Bag	16.94

IDEAL "UNDERGROUND" WIRE CONNECTORS

Suitable for use in a wide variety of direct burial and wet location applications.

PRICED PER 100

IDL No.	Wire Ranges	Color	Standard Package	Price
30-260	Min. 2/20, Max. 1/10 & 2/12	Blue	100-Box	\$162.34

IDEAL AL/CU WIRE CONNECTORS

Only aluminum-to-copper twist-on connector specifically designed to guarantee a secure connection while preventing aluminum corrosion. One time use only. Do not use on Aluminum-to-aluminum combinations.

PRICED PER CARD

IDL No.	Wire Ranges	Color	Std. Pkg.	Price
30-765	Multiple combinations from 18-10 awg.	Purple	10/card	\$27.46

GROUNDING CONNECTORS



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

BURNDY HYGROUND COMPRESSION GROUNDING SYSTEM

- Burndy Hyground is the safest, most cost-effective, time-efficient, and easily inspected grounding system available today. Compression connections can be made in three minutes.
- Connections can be easily removed and replaced.
- Connections can be made in even the most inclement weather conditions – rain, wind, or snow.
- Installation process does not produce heat, smoke, toxic fumes, or other hazardous particles.
- All compression elements are strip sealed to keep all contact surfaces clean and most compression elements are pre-filled with PENETROX™ compound to inhibit moisture and contaminants.
- Crimping embosses the die index number on the connector, confirming consistent connections and providing for easy inspectability.



BURNDY TYPE YH TAP CONNECTOR

High conductivity connector for making parallel and multiple tap connections.

BUR No.	Main	Conductor Range		Die Index & Emboss.	Std. Pkg.	Price/Each
		Tap #1	Tap #2			
YH4444	1000-750 (750-750)	1000-750 (750-750)	--	1102*	50	\$59.87
YH2929	250-2 (4/0-2)	250-2 (4/0-2)	--	654	50	16.56
YH292C	250-2 (4/0-2)	2-6 str/sol (2-8)	8-14 (8-14)	654	60	16.70

* Requires Y46 tool.



BURNDY HYGRID CROSS CONNECTOR

Designed for cross connections as well as "ells" and "tees".


BUR No.	Nom. Rod Dia.	Conductor Range		Die Index		Std. Pkg.	Price/Each
		Run Cable	Tap Cable	Run	Tap		
YGL29C2	1/2 - 5/8	1 Str.-250	6 Sol.-2 Str.	997	0	10	\$32.88
YGL29C29	1/2 - 5/8	2 Str.-250	2 Str.-250	997	997	10	32.88
YGL34C29	5/8 - 3/4	250-500	2 Str.-250	998	997	6	47.70
YGL34C34	5/8 - 3/4	250-500	250-500	1011	1011	6	47.70



BURNDY GRIDLOK GROUND ROD TO GRID CONNECTOR

Provides high torque connection to ground rod.

BUR No.	Conductor Range		Die Index	Std. Pkg.	Price/Each
	Run Rod	Tap Cable Range			
YGLR29C12	1/2	2 Str.-250	998 or 1011	10	\$49.51
YGLR29C58	5/8	2 Str.-250	998 or 1011	10	57.93
YGLR29C34	3/4	2 Str.-250	998 or 1011	6	60.17
YGLR34C34	3/4	250-250	998 or 1011	6	60.34



SEE PAGE G-20 FOR CRIMPING TOOLS

BURNDY GSTUD-HY "VERSITAIL™" STRUCTURAL STEEL GROUNDING CONNECTOR



The VERSITAIL may be welded to steel surfaces quickly and easily with normal construction equipment. Knurled surface is copper plated and specifically designed to ensure excellent mechanical gripping and electrical integrity. Low installation cost. No drilling. No cleaning. No special preparation.

BUR No.	Rod Size	Conduit Size Equivalent	Std. Pkg.	Price/Each
GSTUD916HY	5/8"	1/0	1	\$15.44
GSTUD34HY	3/4"	4/0	1	24.82



BURNDY FIGURE "6" HYTAP CONNECTOR

Can be used as tap connector or a lap splice connector.

BUR No.	Nom. Rod Dia.	Conductor Range		Die Index	Std. Pkg.	Price/Each
		Run Cable	Tap Cable			
YGHP29C2	1/2-5/8	1/0 Str.-250	4 Sol.-2 Str.	997	25	\$14.59
YGHP29C26	1/2-5/8	1/0 Str.-250	1/0 Str.-2/0 Str.	997	25	14.59
YGHP34C29	5/8-3/4	250-500	3/0 Str.-250	998	20	20.86

* Connectors can only be installed using Y790, Y45, Y46 Hypress w/dies.



BURNDY FIGURE "C" HYTAP CONNECTOR

Can be used for tap or cross connections.

BUR No.	Conductor Range		Die Index	Std. Pkg.	Price/Each
	Run	Tap			
YGHC2C2	6 Sol.-2 Str.	6 Sol.-2 Str.	C	50	\$4.24
YGHC26C26	1 Str.-2/0 Str.	1 Str.-2/0 Str.	0	25	8.87
YGHC29C29	3/0 Str.-250	3/0 Str.-250	997	25	12.58
YGHC34C26	300-500	6 Sol.-2/0 Str.	1011	20	23.77
YGHC34C29	300-500	3/0 Str.-250	1011	20	23.77



BURNDY HYTAIL GROUND ROD TAP CONNECTOR

Provides tap or pigtail-type connection from ground rods to grounding counterpoise or grid.

BUR No.	Conductor Range		Die Index	Std. Pkg.	Price/Each
	Run Rod	Tap Cable Range			
YGHR26C12	1/2	2 Str.-2/0 Str.	998 or 1011	20	\$21.30
YGHR26C58	5/8	2 Str.-2/0 Str.	998 or 1011	20	25.98
YGHR26C34	3/4	2 Str.-2/0 Str.	998 or 1011	20	22.94



BURNDY TYPE YGHP-C HYTAP CONNECTOR


Can be used as a ground rod tap connector for both continuous run and tapping applications.

BUR No.	Rod Diameter	Tap Conductor	Die Index	Std. Pkg.	Price/Each
YGHP58C2W-2	1/2 - 5/8	2 Sol.-6 Sol.	997	10	\$17.23



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

SOLDERLESS CONNECTORS, LUGS



PANDUIT DUAL RATED SPLIT BOLTS 600 VOLTS

For use with aluminum and copper conductors.


PAN No.	Max. Run to Max. Tap	Min. Run to Min. Tap	Std. Pkg.	Price/100
SBCT6C	6 Str. - 6 Str.	10 Sol. - 10 Sol.	100	\$358.10
SBCT3C	4 Str. - 4 Str.	8 Sol. - 10 Sol.	100	541.18
SBCT2C	2 Str. - 2 Str.	6 Str. - 8 Str.	100	542.38
SBCT1/0L	1/0 - 1/0	2 Str. - 8 Sol.	50	686.86
SBCT2/0Q	2/0 - 2/0	2 Str. - 8 Str.	25	1550.02
SBCT250Q	4/0 - 4/0	2 Str. - 6 Str.	25	1884.11
SBCT3501	350 - 350	1/0 - 4 Str.	12	3452.51
SBCT5001	500 - 500	400 - 2 Str.	12	4501.04



PANDUIT COPPER SPLIT BOLTS

PAN No.	Range for Equal Run and Tap	Min. Tap with Max. Run	Std. Pkg.	Price/100
SBC6SC	8 Str. - 6 Sol.	14 Str.	100	\$235.35
SBC4SLC	8 Str. - 4 Sol.	14 Str.	100	287.91
SBC3C	6 Str. - 2 Sol.	14 Str.	100	409.35
SBC2C	6 Str. - 2 Str.	14 Str.	100	411.41
SBC1/0L	4 Str. - 1/0	14 Str.	50	589.28
SBC2/0Q	2 Str. - 2/0	14 Str.	25	953.71
SBC3/0Q	1 Str. - 3/0	8 Sol.	25	1299.32
SBC250Q	1 Str. - 250	8 Str.	25	1521.89
SBC5001	2/0 - 500	2/0	12	3645.49


PANDUIT DUAL RATED SOLDERLESS LUGS 600 VOLTS

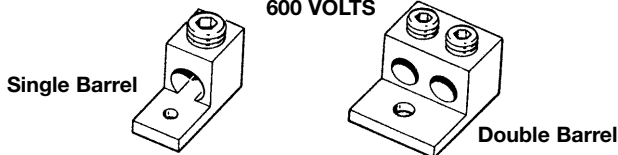

For use with aluminum and copper conductors.

PAN No.	Wire Range	Std. Pkg.	Price/100
SINGLE BARREL			
LAMA614Q	6 - 14	100	\$64.76
LAMA214Q	2 - 14	50	87.01
LAMA1/014Q	1/0 - 14	50	123.41
LAMA2/014Q	2/0 - 6	50	138.50
LAMA25056Q	250 - 6	25	293.99
LAMA35038Q	350 - 6	25	380.95
LAMA500386	500 - 4	12	740.36
DOUBLE BARREL			
LAM2A1/0146	1/0 - 14	12	243.44
LAM2A250386	250 - 6	6	705.58
LAM2A350126	350 - 4	6	975.96
LAM2A600126Y	600 - 2	3	1516.43


PANDUIT DUAL RATED PANELBOARD LUGS 600 VOLTS

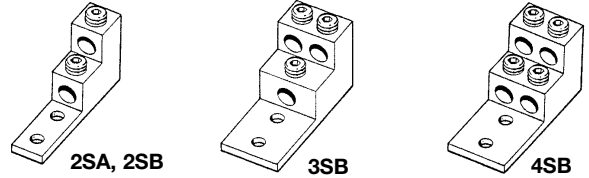

For use with aluminum and copper conductors.


PAN No.	Wire Range	Description	Std. Pkg.	Price/100
LAM2SA300563	300 - 6	2 barrel	3	\$848.57
LAM2SB600381	600 - 2	2 barrel	1	3814.84
LAM2SB750381	750-3/0	2 barrel	1	4031.56
LAM3SB600381	600 - 2	3 barrel	1	4165.19
LAM4SB600381	600 - 2	4 barrel	1	4850.21

PANDUIT COPPER POST CONNECTORS 600 VOLTS



For use with copper conductors.

PAN No.	Wire Range	Std. Pkg.	Price/100
PNL8C	8 - 14	100	\$157.51
PNL4C	4 - 14	100	202.79
PNL1/0L	1/0 - 14	100	399.07
PNL250Q	250 - 6	25	944.71
PNL5003	500 - 4/0	18	2260.91




PANDUIT DUAL RATED SPLICERS/REDUCERS 600 VOLTS

For use with aluminum and copper conductors.

PAN No.	Wire Range	Standard Package	Price/100
SR-2X	2 - 14	10	\$351.15
SR-0X	1/0 - 8	10	458.98
SR-250X	250 - 6	10	1113.13
SR-5003	500 - 3/0	3	1841.74

BURNDY INSULATION PIERCING CONNECTORS



For indoor/outdoor use. Dual rated for copper or aluminum conductors in any combination. Can be used for straight splice or tap splice connections. Can be installed on energized main conductors, tap conductor must not be under load.


BUR No.	Conductor Range, Run x Tap	Standard Package	Price/Each
300 VOLTS			
BIPC4/0-6	4/0-1/0 x 1/0-6	12	\$14.71
BIPC4/0-1/0	4/0-1/0 x 4/0-1/0	8	18.91
BIPC350-4/0	350-4/0 x 4/0-1/0	4	48.90
BIPC350-350	350-4/0 x 350-4/0	4	60.21
600 VOLTS			
BIPC1/0-2	1/0-8 x 2-8	12	11.84
BIPC500-4/0	500-350 x 4/0-4	4	74.56

COMPRESSION SLEEVES, LUGS, TAP CONNECTORS



SHAW SUPPLY COMPANY
1066 East 16th Street
816-221-0060
www.shawsupply.com

BURNDY COMPRESSION SLEEVES



BUR No.	Wire Range	Die Color Code	Standard Package	Price/100
ALUMINUM/COPPER—600 VOLTS				
YS4CA1	4	Green	10	\$406.80
YS2CA1	2 or 3	Pink	10	630.00
YS1CA1	1	Gold	10	853.20
YS25A1	1/0	Tan	10	1074.60
YS26A1	2/0	Olive	5	1144.80
YS27A1	3/0	Ruby	5	1321.20
YS28A1	4/0	White	5	1423.80
YS29A1	250 MCM	Red	5	1468.80
YS31A1	350 MCM	Brown	2	1632.60
YS34A1	500 MCM	Pink	2	2662.20

COPPER

YS8CL	8	Red	50	178.20
YS6CL	6	Blue	50	325.80
YS4CL	4	Gray	50	387.00
YS2CL	2	Brown	25	469.80
YS1CL	1	Green	10	561.60
YS25L	1/0	Pink	10	608.40
YS26L	2/0	Black	10	651.60
YS27L	3/0	Orange	10	752.40
YS28L	4/0	Purple	10	819.00
YS29L	250 MCM	Yellow	6	927.00
YS30L	300 MCM	White	6	1092.60
YS31L	350 MCM	Red	6	1130.40
YS34L	500 MCM	Brown	6	1571.40

LONG BARREL—COPPER

YS2C	2	Brown	25	575.69
YS25	1/0	Pink	10	750.98
YS26	2/0	Black	10	804.77
YS27	3/0	Orange	10	928.27
YS28	4/0	Purple	10	982.06
YS29	250 MCM	Yellow	10	1121.50
YS31	350 MCM	Red	10	1324.68
YS34	500 MCM	Brown	6	1798.78

BURNDY THIN-WALL HEAT SHRINK TUBING CLEAR—ON REELS

BUR No.	Conductor Range	Standard Package	Price/Each
HSC38FR	#8 - #6	50'	\$2.41
HSC12FR	#6 - #4	50'	2.88
HSC34FR	#2 - 1/0	50'	4.13
HSC100FR	1/0 - 4/0	25'	5.95
HSC112FR	250 - 500MCM	25'	8.98
HSC200FR	500 - 750MCM	25'	18.64


BURNDY HYSTACK ADAPTORS



The HYSTACK™ adaptor is specially designed to allow standard terminals to be stacked on two or four hole NEMA transformer or equipment terminal pads.

BUR No.	Conductor Range	Standard Package	Price/Each
ASA250U	250 MCM	1	\$9.44
ASA800U	800 MCM	1	11.49

BURNDY COMPRESSION LUGS




BUR No.	Wire Range	Die Color Code	Standard Package	Price/100
ALUMINUM/COPPER—600 VOLTS				
YA6CA3	6	Gray	10	\$362.25
YA4CA3	4	Green	10	386.40
YA2CA1	2 or 3	Pink	10	451.95
YA1CA1	1	Gold	10	555.45
YA25A3	1/0	Tan	10	617.55
YA26A6	2/0	Olive	5	803.85
YA27A1	3/0	Ruby	5	1085.03
YA28A1	4/0	White	5	1266.15
YA29A1	250 MCM	Red	5	1302.38
YA31A1	350 MCM	Brown	6	1564.58
YA34A1	500 MCM	Pink	2	3065.33

COPPER

YA8CL	8	Red	50	129.38
YA6CL	6	Blue	50	139.73
YA4CL	4	Gray	50	182.85
YA2CL6	2	Brown	25	358.80
YA1CL4	1	Green	20	372.60
YA25L4	1/0	Pink	10	398.48
YA26L	2/0	Black	10	460.58
YA27L	3/0	Orange	10	569.25
YA28L	4/0	Purple	10	624.45
YA29	250 MCM	Yellow	10	900.45
YA30	300 MCM	White	10	1069.50
YA31	350 MCM	Red	10	1146.95
YA34	500 MCM	Brown	6	1649.10

LONG BARREL—COPPER—2 HOLE TERMINALS

YA2C-2N	2	Brown	25	648.60
YA25-2N	1/0	Pink	10	771.08
YA26-2N	2/0	Black	10	815.93
YA27-2N	3/0	Orange	10	938.40
YA28-2N	4/0	Purple	10	1074.68
YA29-2N	250 MCM	Yellow	10	1233.38
YA31-2N	350 MCM	Red	10	1561.13
YA34-2N	500 MCM	Brown	6	2256.30



BURNDY DUAL RATED PARALLEL TAP CONNECTORS WITH COVERS—600 VOLTS

For use with aluminum and copper conductors.

BUR No.	Wire Range, Main	Wire Range, Tap	Standard Package	Price/100
KPU29A26AC	1/0-250	14-2/0	6	\$1454.66
KPU29A29AC	1/0-250	6-250	6	1397.39
KPU34A26AC	4/0-500	14-2/0	6	2710.78
KPU34A34AC	4/0-500	6-500	6	2718.42

SEE PAGE G-20 FOR CRIMPING TOOLS.



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

TERMINALS

Panduit "Pan-term" Terminals

Panduit terminals feature high quality materials made with electrolytic copper for high conductivity and are plated for corrosion resistance.

All vinyl insulated terminals feature:

- 105°C (221°F) temperature rating
- Brazed seam for crimp reliability
- Funnel entry for faster insertion and lower installed cost
- Color coded insulation identifies wire range
 Yellow: 12-10 AWG - Blue: 16-14 AWG - Red: 22-18 AWG


PANDUIT VINYL INSULATED RING TONGUE TERMINALS BRAZED SEAM



Temperature rating: 105°C. Voltage rating: 600V max. building wire, 1000V max. signs, fixtures and luminaires.

PAN No.	Wire Range	Stud Size	Standard Package	Price
PV14-8R-C	16 - 14	8	100-500	\$47.34
PV14-10R-C	16 - 14	10	100-500	47.34
PV10-10R-L	12 - 10	10	50-500	61.11
PV10-14R-L	12 - 10	1/4"	50-500	74.20


PANDUIT VINYL INSULATED LOCKING FORK TERMINALS BRAZED SEAM



Temperature rating: 105°C. Voltage rating: 600V max. building wire, 1000V max. signs, fixtures and luminaires.

PAN No.	Wire Range	Stud Size	Standard Package	Price
PV18-6LF-C	22 - 18	6	100-500	\$50.34
PV18-8LF-C	22 - 18	8	100-500	50.34
PV18-10LF-C	22 - 18	10	100-500	52.35
PV14-6LF-C	16 - 14	6	100-500	51.23
PV14-8LF-C	16 - 14	8	100-500	51.23
PV14-10LF-C	16 - 14	10	100-500	51.73
PV10-10LFX-L	12 - 10	10	50-500	74.23
PV10-14LFX-L	12 - 10	1/4"	50-500	96.35

PANDUIT VINYL INSULATED FEMALE DISCONNECT TERMINALS BUTTED SEAM



Temperature rating: 105°C. Voltage rating: 600V max. building wire, 1000V max. signs, fixtures and luminaires.

PAN No.	Wire Range	Snap Dia. or Tab Size	Std. Pkg.	Price
DV18-1888B-C	22 - 18	.187"/	50	\$60.51
DV14-250B-C	16 - 14	.250"/.032"	100-500	59.42
DV10-250-L	12 - 10	.250"/.032"	50-500	81.86


PANDUIT VINYL INSULATED MALE DISCONNECT TERMINALS BUTTED SEAM



Temperature rating: 105°C. Voltage rating: 600V max. building wire, 1000V max. signs, fixtures and luminaires.

PAN No.	Wire Range	Snap Dia. or Tab Size	Std. Pkg.	Price
DV14-250MB-C	16 - 14	.250"/.032"	100-500	\$65.48
DV10-250M-L	12 - 10	.250"/.032"	50-500	73.53


PANDUIT VINYL INSULATED BUTT CONNECTOR TERMINALS SEAMLESS



Temperature rating: 105°C. Voltage rating: 600V max. building wire, 1000V max. signs, fixtures and luminaires.

PAN No.	Wire Range	Standard Package	Price
BSV18X-C	22 - 18	100-500	\$48.77
BSV14X-C	16 - 14	100-500	48.32
BSV10X-L	12 - 10	50-500	71.70


PANDUIT VINYL INSULATED PIN TERMINALS



Temperature rating: 105°C. Voltage rating: 600V max. building wire, 1000V max. signs, fixtures and luminaires.

PAN No.	Wire Range	Standard Package	Price/100
PV10-P55-L	12-10	50-500	\$118.42

**FOR CRIMPING TOOLS SEE
PAGE G-19**




INSULATED CONNECTORS, TERMINAL BLOCKS



SHAW SUPPLY COMPANY
1066 East 16th Street
816-221-0060
www.shawsupply.com

POLARIS INSULATED CONNECTORS

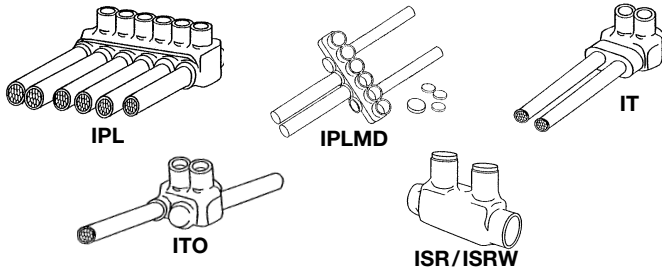

IPL Series: Insulated multi cable connector blocks - wire entry from one side.

IPLMD Series: Same as above except wire entry from either side.

IPLMD Series: Same as above except with mounting holes at each end of the connector.

ISR/ISRW Series: Insulated connector for connecting 2 wires in-line.

IT Series: Insulated connectors for connecting 2 wires from the same side of the connector.

ITO Series: Same as above except allows for wires to be connected from opposite sides of the connector.

POL No. & Size	Description	Standard Package	Price/Each
IPL4-3	Standard connector.	12	\$16.03
IPL1/0-3	Standard connector.	12	20.20
IPL1/0-4	Standard connector.	6	22.90
IPL3/0-3	Standard connector.	6	23.92
IPL3/0-4	Standard connector.	6	28.02
IPL250-3	Standard connector.	6	27.80
IPL250-4	Standard connector.	6	28.93
IPL500-3	Standard connector.	3	43.89
IPL500-4	Standard connector.	3	48.10
ISR1/0	Inline splice.	4	17.16
ISR250	Inline splice.	4	25.89
ISR350	Inline splice.	2	28.42
ISR500	Inline splice.	2	42.43
IPLD250-5	Wire entry either side.	2	39.72
IPLD500-5	Wire entry either side.	2	73.26
IT4	Tap connector.	12	10.80
IT1/0	Tap connector.	6	14.96
IT3/0	Tap connector.	6	18.51
IT250	Tap connector.	6	26.84
IT350	Tap connector.	4	34.20
IT500	Tap connector.	4	50.52
ITO3/0	Tap connector.	6	18.51

DIRECT BURIAL RATED

ISRW4	Waterproof inline splice.	12	15.98
ISRW1	Waterproof inline splice.	6	19.99
ISRW3/0	Waterproof inline splice.	4	24.00
ISRW250	Waterproof inline splice.	4	30.01

UF DIRECT BURIAL SPLICE KIT



EPC No.	Description	Std. Pkg.	Each
UFC2B	Kit includes (1) four position connector & 1 piece of heat shrink tubing. Designed to splice & insulate 14-18 AWG UF cable.	6	\$12.13

POLARIS NSI DOUBLE ROW TERMINAL BLOCKS



Made from strong, glass-filled polyester, these blocks are rated for 30 amps and 600 volts maximum. Screws are #8 stud size. Other sizes and styles available. Wire size: #22-12 AWG.

POL No. & Size	Description	Standard Package	Price/Each
TB3096-6	6 position block	6	\$6.84
TB3096-8	8 position block.	4	8.57
TB3096-12	12 position block.	3	12.48

BUCHANAN 300V MEDIUM DUTY TERMINAL BLOCKS



Snap-fit sections. Phenolic.

CHANNEL MOUNTING—DOVETAIL BASE

BCN No.	Description	Wire Size	Standard Package	Price/100
0924	Tubular screw.	18 - 8	100	\$207.29
0925	Tubular clamp.	22 - 10	100	231.07
0930	End section.	--	25	91.13

ACCESSORIES

BCN No.	Description	Price/Each
60	6 ft., steel mtg. channel.	\$20.61

BUCHANAN 600V HEAVY DUTY TERMINAL BLOCKS



Snap-fit sections. Phenolic.

CHANNEL MOUNTING—DOVETAIL BASE

BCN No.	Description	Wire Size	Standard Package	Price/100
0222	Tubular screw.	18 - 4	40	\$305.09
0230	End section.	--	25	204.62



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com


CABLE TIES, WIRE MARKERS

Panduit "Pan-Ty" Cable Ties

Panduit cable ties feature a one-piece design for consistent performance and reliability. Available in multiple lengths, styles, materials, and colors for specific applications.

- Lowest threading force of any one-piece cable tie
- Curved tip is easy to pick up, allows faster installation

CABLE TIES

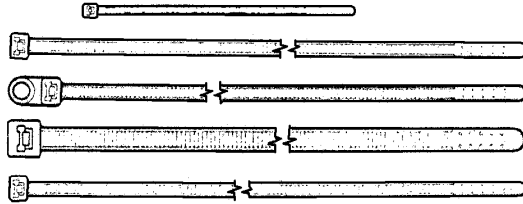


PRICE PER 100

PAN No.	Description	Length x Width	Tensile Strength Lbs.	Std. Pkg.	Price
NATURAL NYLON					
PLT1MC	Miniature cross section.	3.9 x .098	18	100-1000	\$11.15
PLT1.5IC	Intermediate cross section.	5.6 x .142	40	100-1000	12.91
PLT2SC	Standard cross section.	7.4 x .190	50	100-1000	16.46
PLT3SC	Standard cross section.	11.5 x .190	50	100-1000	32.92
PLT4HL	Light-Heavy cross section (straight tip).	14.5 x .300	120	50-500	54.62
PLT8HL	Heavy cross section (straight tip).	30.6 x .350	175	50-500	126.00
PLC2SS10C	Mounting tie with eye. Standard cross section.	7.9 x .190	50	100-1000	26.29

WEATHER RESISTANT BLACK

PLT2SC0	Standard cross section.	7.4 x .190	50	100-1000	17.59
PLT3SC0	Standard cross section.	11.5 x .190	50	100-1000	35.29

CABLE TIE BASE



General purpose. Indoor use.


PRICE PER 100

PAN No.	Description	Standard Package	Price
SMSAC15	Cable tie base, Ivory. 1" x 2". Backed with adhesive.	100-500	\$152.69

PLENUM RATED CABLE TIES

PRICE PER 100

MIS No.	Description	Price
200172	Standard tie; red halar. Length: 7", Max. bundle dia.: 1-5/8", Min. tensile strength: 50 lbs.	\$28.96




3M SCOTCHCODE WIRE MARKER TAPE DISPENSER

Smooth surface allows dirt and grime to be easily wiped off. Use in applications involving temperatures between -40° and 250°F. Compact and easy to handle. Hangs from tool belt.

MMM No.	Description	Price/Each
STD	Dispenser only.	\$10.67
STD-0-9	Dispenser with numbers 0-9.	32.48

REPLACEMENT MARKER TAPE

MMM No.	Printing on Roll	Standard Package	Price/Each
SDR-0	0	10	\$2.03
SDR-1	1	10	2.03
etc. thru SDR-9	etc. thru 9	10	2.03



3M SCOTCHCODE WRITE-ON DISPENSER

Self-laminating write-on markers are easy to use, refillable and include one SMP black permanent marking pen. .75" x 1.375".

MMM No.	Description	Standard Package	Price/Each
SWD	Write-on Dispenser.	10	\$25.63
SWD-R	Refill roll.	10	19.81

WIRE MARKER PEN—STANDARD PACKAGE: 10

MMM No.	Price/Each
SMP	\$4.78

PRINTED WIRE MARKER BOOKS

Vinyl cloth markers with clearly printed letters, numbers and industry-standard legends. Includes one Post-it note pad.

PLY No.	MMM No.	Description	Std. Pkg.	Price/Each
6801	SPB-01	45 each 0-9; 15 each L1, L2, L3, T1, T2, T3.	5	\$15.34
6802	SPB-02	10 each A-Z, 0-15, +, -, /.	5	15.34
6803	SPB-03	10 each 1-45.	5	15.34
6814	SPB-14	10 each 46-90.	5	15.34
--	SPB-15	9 each of 30 alarm system legends: (+ Circuit +, - Circuit -, + DC, -DC, AC AC, Zone 1 thru Zone 9, Shunt, Ground, Fire, BA BA, Feed, Return, Phone Feed, Phone Return, Bell, Annunciator, Tamper, 12 Volt, 16 Volt, 24 Volt, Smoke Detector, Thermostat, 5 each 1-15, 2 each 16-45, 21 each blank write-on markers.	5	15.34

3M SCOTCHCODE WRITE-ON BOOKS

This self-laminating write-on marker is designed for small volume applications involving special or complex legends.

MMM No.	No. of Labels	Write-On Area, In. W x H	Marker Size, In. W x L	Standard Package	Price/Each
SWB-1	180	.50 x .50	.50 x 1.5	5	\$15.76
SWB-2	120	.75 x .75	.75 x 1.75	5	15.83
SWB-3	60	1.0 x 1.0	1.0 x 2.85	5	15.83

